

CLASS 3 TRAILER HITCH

R3-0523

Toyota Rav4

TOOLS REQUIRED:


DRILLS: None

WRENCHES: Torque Wrench, Ratchet

SOCKETS: 17mm, 19mm, Socket Extension

HITCH RATING: 4,000 LBS WEIGHT CARRYING, 400 LBS TONGUE WEIGHT / 4,000 LBS WEIGHT DISTRIBUTING, 400 LBS TONGUE WEIGHT. WARNING: CONSULT VEHICLE OWNERS MANUAL FOR TOWING RECOMMENDATIONS. DO NOT EXCEED VEHICLE'S RECOMMENDED TOWING CAPACITY. THIS PRODUCT IS DESIGNED FOR TRAILER TOWING ONLY AND SHOULD NOT BE USED FOR ANY OTHER PURPOSE.

NOTE: INSTALL PARTS LOOSELY UNTIL ALL ATTACHMENTS HAVE BEEN MADE TO VEHICLE

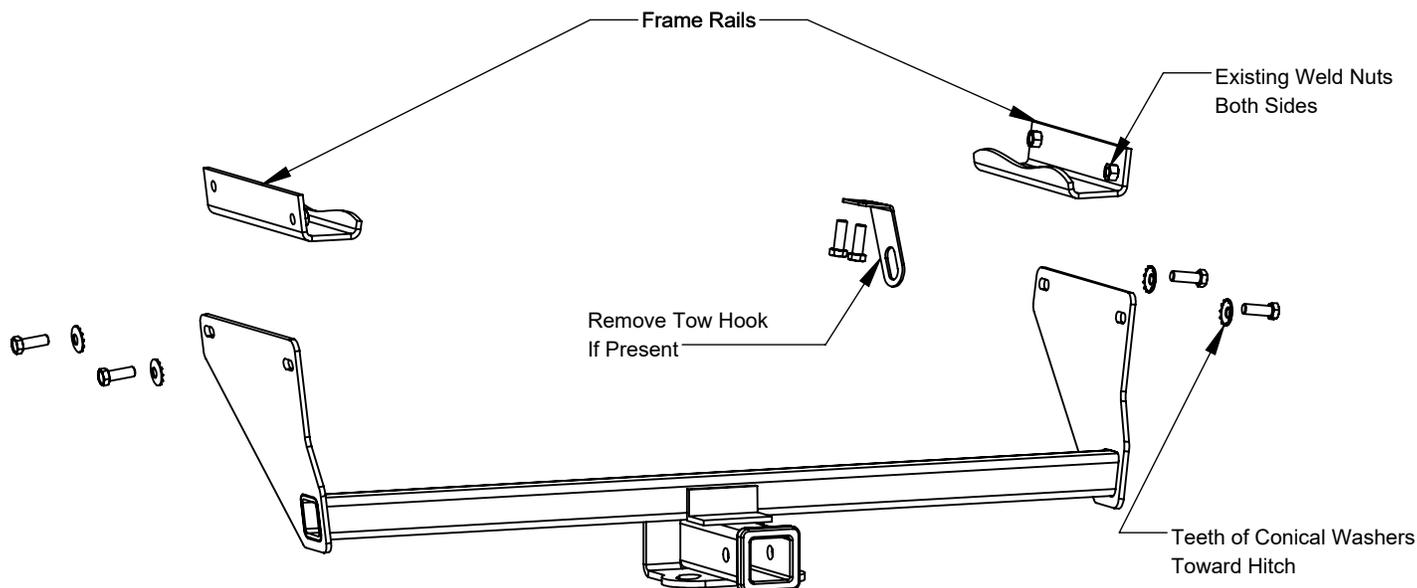


1. Remove the stickers covering the mounting holes on the outside of frame rails.
2. If present, remove the tow hook from the bottom of the passenger side frame rail. Return tow hook and hardware to the vehicle owner.
3. Raise the hitch into position and loosely attach with the (4) M12 hex bolts and conical washers provided.
4. Torque all fasteners to 68 ft-lbs.

Thank you for purchasing a Rigid Hitch

Hardware Kit: (4) M12 x 1.25 x 35mm Hex Bolts (4) 1/2" Conical Washers

GIVE THIS INSTRUCTION SHEET TO VEHICLE OWNER



THIS PRODUCT COMPLIES WITH SAFETY SPECIFICATIONS AND REQUIREMENTS FOR SAE AND VESC REGULATION V-5 FOR CONNECTING DEVICES AND TOWING SYSTEMS. **DO NOT MODIFY THIS PRODUCT. INSTALL ONLY ON SPECIFIED VEHICLES IN GOOD CONDITION.**

RIGID[®]
HITCH INCORPORATED
3301 WEST BURNSVILLE PARKWAY
BURNSVILLE, MN 55337

REV.
6/19