
CLASS 3 TRAILER HITCH R3-0869 CHEVROLET EQUINOX/ GMC TERRAIN

TOOLS REQUIRED: DRILLS: None

WRENCHES: Torque Wrench, Ratchet SOCKETS: 15/16", Socket Extension

HITCH RATING: 3,500 LBS WEIGHT CARRYING, 525 LBS TONGUE WEIGHT NOT RATED FOR WEIGHT DISTRIBUTING WARNING: CONSULT VEHICLE OWNERS MANUAL FOR TOWING RECOMMENDATIONS. DO NOT EXCEED VEHICLE'S RECOMMENDED TOWING CAPACITY. THIS PRODUCT IS DESIGNED FOR TRAILER TOWING ONLY AND SHOULD NOT BE USED FOR ANY OTHER PURPOSE.

NOTE: INSTALL PARTS LOOSELY UNTIL ALL ATTACHMENTS HAVE BEEN MADE TO VEHICLE

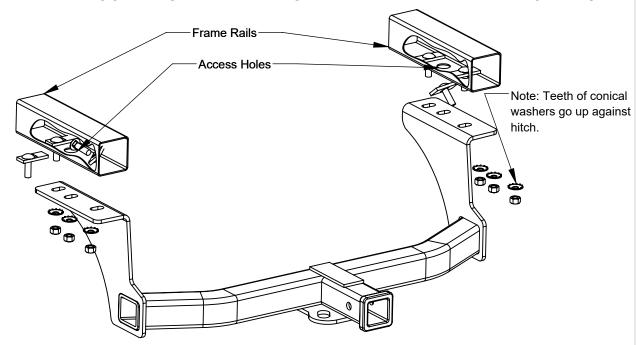

Note: To ease hardware installation enlarge access holes with die grinder

- Locate and remove the plastic push pin that attaches the wiring harness to the bottom of the 1. passenger side frame rail.
- 2. Use the fish wires provided to insert the carriage bolts and block plates into the forward and rearward mounting holes in each frame rail. Fish wire the final carriage bolts and block plates into the access holes in each frame rail. Leave all fish wires attached.
- 3. Thread the fish wires through the mounting slots on the hitch, and carefully raise the hitch into position.
- 4. Using care not to push the hardware back up into the frame rails, remove the fish wires and loosely secure the hitch with the conical washers and hex nuts provided.
- Center the hitch on the vehicle and torque all fasteners to 68 ft-lbs. 5.

Thank you for purchasing a Rigid Hitch

(6) 1/2"-13 x 1-3/4" Carriage Bolts

(6) 1/2" Conical Washers

(6) 1/2" Heavy Hex Nuts

(6) 1/4 x 1 x 2" Block Plates

(6) 1/2" Fish Wires

GIVE THIS INSTRUCTION SHEET TO VEHICLE OWNER



Hardware Kit:

THIS PRODUCT COMPLIES WITH SAFETY SPECIFICATIONS AND REQUIREMENTS FOR SAE AND VESC REGULATION V-5 FOR SAE AND VESU REGULATION VEST CONNECTING DEVICES AND TOWING SYSTEMS. DO NOT MODIFY THIS PRODUCT. INSTALL ONLY ON SPECIFIED VEHICLES IN GOOD CONDITION.

